FAE

WE DEVELOP CUSTOMIZED ELECTRONIC SENSOR SOLUTIONS

OXYGEN SENSOR XFOUR

+65	+2k	+27M
PART NUMBERS	APPLICATIONS	VIO





Cable
Fluoropolymer cable coating with high performance for extreme temperature conditions

Protective tube

Ceramic clip
In-house manufactured. Connects the wires to the sensor and prevents them from disconnecting

Ceramic insulators
Ensure sealing and prevent contamination that could embed the sensor and isolate it from vibrations and shocks

Sensor
Multilayer ceramic planar technology. Ink and ceramic formulation. Individually calibrated. Integrated heater for ultra-fast ignition

Key advantages of the LSF Xfour

Faster, more precise, more resistant

- **Superior accuracy** for a cleaner and more efficient engine.
- **Instant response** optimizing performance from the very first start.
- **TSP protection** that withstands thermal shocks and extends service life.
- **Optimized lambda curve** for consistently stable and accurate readings.
- **Advanced thermal management** with fast and safe heating.
- **Compact design** that adapts to any installation.
- **Proven emission reduction** under real operating conditions.
- **Enhanced durability** for reliable long-term performance.

Top References

Ref. 71174

VIO 4.59 M



• **Peugeot** 208, 2008, 3008
• **Citroën** C3, C4 • **Opel** Corsa, Crossland

Ref. 71160

VIO 3.28 M




• **Ford** Ecosport, Focus, Fiesta, Kuga, C-Max, Transit

Ref. 71154

VIO 3.16 M



• **Mini** Mini, Countryman, Clubman
• **BMW** X1, Serie 2, X2, X5

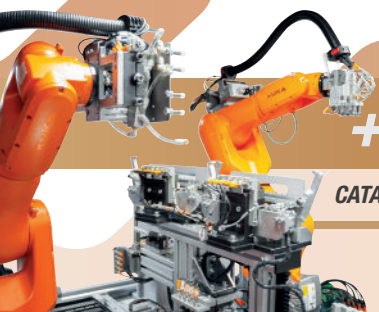

+11	+75	+180M²	+1000M²	+5.000	+12.000M²
CATALOGUES	YEARS	ESD ROOM	CLEAN ROOM	PART NUMBERS	BARCELONA

TecDoc Catalogue
https://web.tecalliance.net/fae +34 932 618 500 fae@fae.es www.fae.es